

SERVICE BULLETIN No 10-21

**PRODUCTION CHANGE**

DATE: 8/10/87

**SUBJECT: ENGINE DAMPNER SECURING BOLT**  
**VEHICLES: ALL**


Starting from:	Model	328 3.2 M	Turbo	TR	412		
	Area	All	Italy	All	All		
	Chassis no.	68881	68869	69263	68957		
	Engine no.						
	Gearbox no.						

**Description:**

The bolt securing the front dampner is installed with loctite type 242; the torque specification remains unchanged (20 Kgm = 145 ft. lb.). The bolts installed with this new procedure can be recognized from a yellow painted marking on them.

**Reason:**

Production Improvement

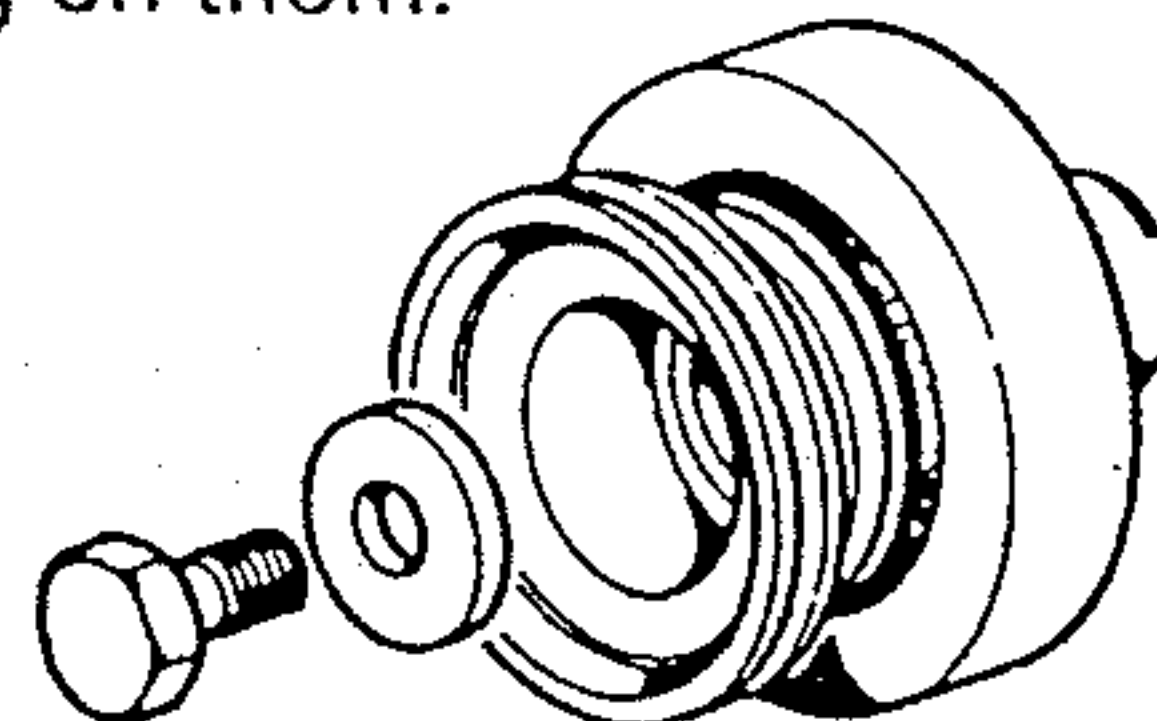

REPLACED PARTS			NEW PARTS		
ref. fig.	Part Number	Description	ref. fig.	Part Number	Description

Spare parts procedures:

Reference spare parts catalogue:

